
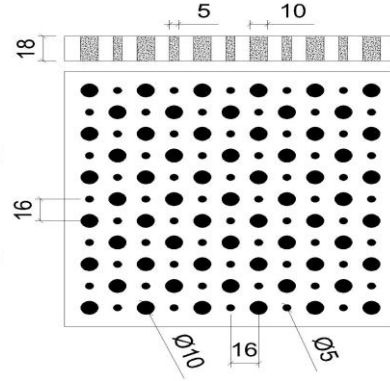


PRODUCT DEFINITION:

Acoustic panel with holes on wieved face and at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

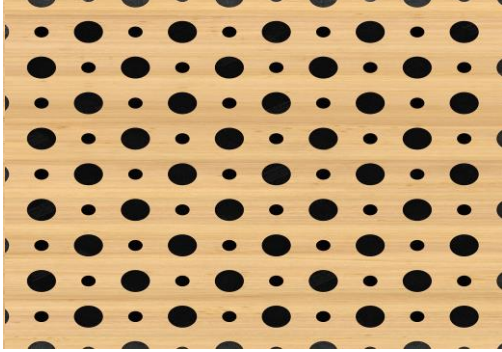

FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	Without Mineral Wool	0,31	0,45	0,60	0,67	0,82	0,89	0,94	0,89	0,81	0,70	0,59	0,67	0,65	0,62	0,65	0,68	0,72	0,70
	With Mineral Wool	0,51	0,63	0,68	0,82	0,91	0,94	0,98	0,93	0,89	0,87	0,87	0,80	0,77	0,75	0,74	0,76	0,76	0,79

ACOUSTIC FEATURES:


Distance Between Holes (mm) 16
Diameter Of Hole (mm) 5/10
Pitch Of Hole (mm) 16x16
Depth Of Hole (mm) 18
Perforated Area (%) 20

ACOUSTIC VALUES

Mounting Depth 200mm **NRC** **Euro Class**
Without Mineral Wool 0,75 C
With Mineral Wool 0,85 B

Mineral Wool 50 mm 50 kg/m3

Absorption according to EN ISO 354

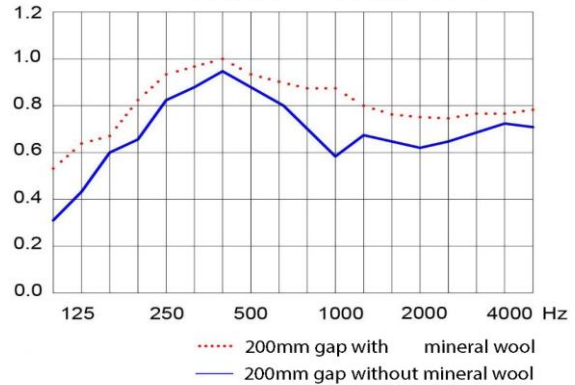

GENERAL FEATURES:

Materials MDF Standart D-s2.d0
MDF Fire Resistant B-s2.d0

Thickness (mm) 18mm (MDF)
For other materials and thicknesses, please contact with PERFOFAN

Approximate Weight 13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fire Resistant MDF

Finishing Melamine Wood Veneered High Pressure Laminate (HPL)
Varnished Lacquered to RAL Chart

Sizes

Mounting Type: Aluminium Profile	FR Class	D Class
Melamine	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
	576x1800	576x1800
HPL	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
	576x1800	576x1800
	576x3640	576x3640

Mounting Type: Aluminium Profile	FR Class	D Class
Veneered	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
	576x1800	576x1800
Lacquered	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
	576x1800	576x1800
	576x3640	576x3640